



OCN-068

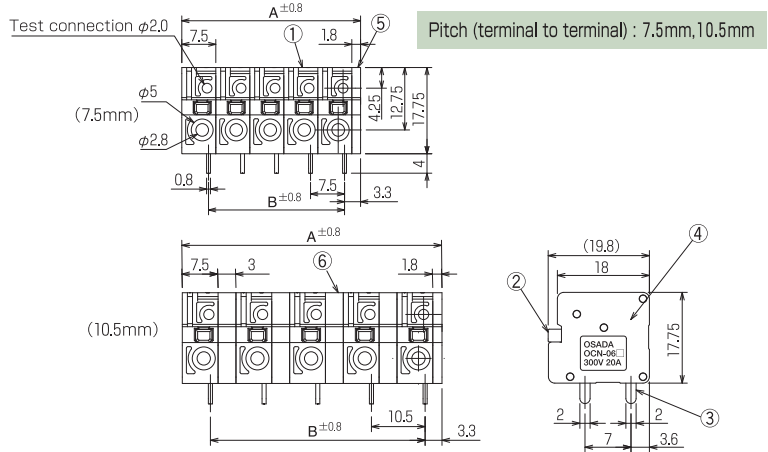

OCN-068N : Test connection none



Specifications

| | |
|----------------------------|--------------------------------------|
| Electrical Rating | 7.5mm : 300V, 15A 10.5mm : 600V, 15A |
| Insulation Resistance | DC500V, 1000MΩ |
| Withstanding Voltage | AC2500V |
| Cable Range | AWG22~14 |
| Wire Strip Length | 13~14mm |
| Storage Temperature Rating | -40°C~+80°C |
| Usage Temperature Rating | -40°C~+80°C |

Composition

| No. | Part Name | Materials | Flame Class | Treatment | Remarks |
|-----|-------------|---------------|-------------|-----------|---------|
| ① | Base | PA66 | 94V-0 | | |
| ② | Push Button | Polycarbonate | | | |
| ③ | Terminal | Brass | | Sn | |
| ④ | Spring | SUS301 | | | |
| ⑤ | Side Plate | PA66 | 94V-0 | | |
| ⑥ | Spacer | PA66 | 94V-0 | | |

※Gray (Standard Color), 4 colors combination (Red, Blue & Black)

Measurements List of A & B (P : Number of terminals)

| Pitch | P | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
|--------|---|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| 7.5mm | A | 16.8 | 24.3 | 31.8 | 39.3 | 46.8 | 54.3 | 61.8 | 69.3 | 76.8 | 84.3 | 91.8 | 99.3 | 106.8 | 114.3 | 121.8 | 129.3 | 136.8 | 144.3 | 151.8 | |
| | B | 7.5 | 15 | 22.5 | 30 | 37.5 | 45 | 52.5 | 60 | 67.5 | 75 | 82.5 | 90 | 97.5 | 105 | 112.5 | 120 | 127.5 | 135 | 142.5 | |
| 10.5mm | A | 19.8 | 30.3 | 40.8 | 51.3 | 61.8 | 72.3 | 82.8 | 93.3 | 103.8 | 114.3 | 124.8 | 135.3 | 145.8 | 156.3 | 166.8 | 177.3 | 187.8 | 198.3 | 208.8 | |
| | B | 10.5 | 21 | 31.5 | 42 | 52.5 | 63 | 73.5 | 84 | 94.5 | 105 | 115.5 | 126 | 136.5 | 147 | 157.5 | 168 | 178.5 | 189 | 199.5 | |

