OCN-3102

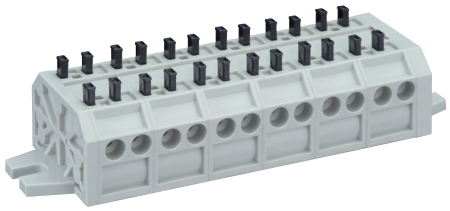

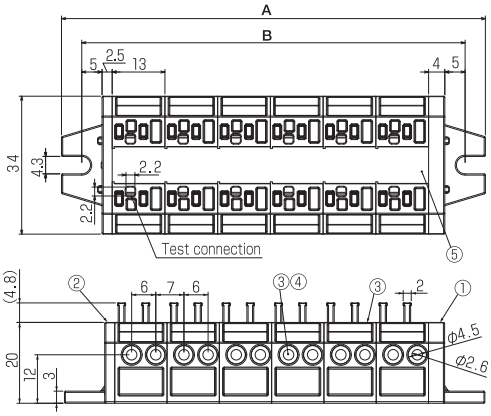



Pitch (terminal to terminal)
: 13mm

※OCN-3100 and OCN-3102 can be combined.

The button can be selected high or low. Low button adds "S" to the model name of articles.



Specifications

Electrical Rating	600V, 20A （CUL＝600V, 10A）
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Cable Range	Str AWG24～14 Sol AWG24～12
Storage Temperature Rating	−40℃～＋80℃
Usage Temperature Rating	−40℃～＋80℃

※Gray(Standard Color), 4 colors combination(Black, Red & Blue)

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PA66	94V−0		
②	Push Button	Polycarbonate	94V−0		
③	Terminal	Brass		Sn	
④	Spring	SUS301			
⑤	Marking Strip				Optional

Measurements List of A & B(P : Number of terminals)　Allowance　2～10P　±0.5　11～20P　±0.8　More than 21P are special order products.

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	39.5	52.5	65.5	78.5	91.5	104.5	117.5	130.5	143.5	156.5	169.5	182.5	195.5	208.5	221.5															
B	29.5	42.5	55.5	68.5	81.5	94.5	107.5	120.5	133.5	146.5	159.5	172.5	185.5	198.5	211.5															