



OCN-3102N




PAT

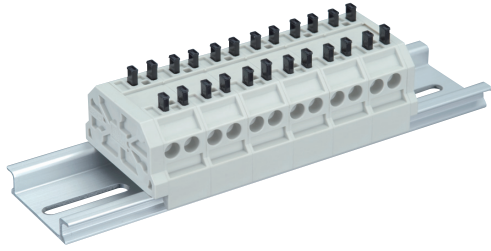

※OCN-3000N, OCN-3002N, OCN-3100N and OCN-3102N can be combined.
 ※Another sales (Din-rail)

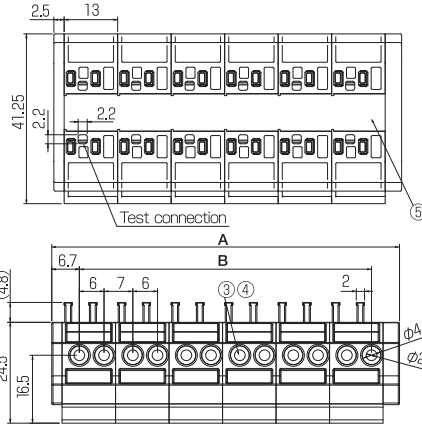

Pitch (terminal to terminal)
: 13mm




Specifications

Electrical Rating	600V, 20A (CUL=600V, 10A)
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Cable Range	Str AWG24~14 Sol AWG24~12
Storage Temperature Rating	-40°C~+80°C
Usage Temperature Rating	-40°C~+80°C

※Gray(Standard Color), 4 colors combination(Black, Red & Blue)
 More than 21P are special order products.

The button can be selected high or low.
 Low button adds "S" to the model name of articles.



Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PA66	94V-0		
②	Push Button	Polycarbonate	94V-0		
③	Terminal	Brass		Sn	
④	Spring	SUS301			
⑤	Marking Strip				Optional
⑥	DIN rail (35mm)	Aluminum			Optional

Ordering Lot

Part Name	Base	Side Plate (Unit)		Stopper (height 13mm=OTY-13, 18mm=OTY-18)	
		OCN-3102N-A	OCN-3102N-B	OTY-13	OTY-18
Order Name	OCN-3102N	OCN-3102N-A	OCN-3102N-B	OTY-13	OTY-18
Piece	50	5	5	50	50

Side Plate

