


OHT-003

UL US (FW2)

Pitch (terminal to terminal) : 13mm




Standard



OHT-003N

Shape altered available.

※As an example at the photos, the shape can be adjusted.

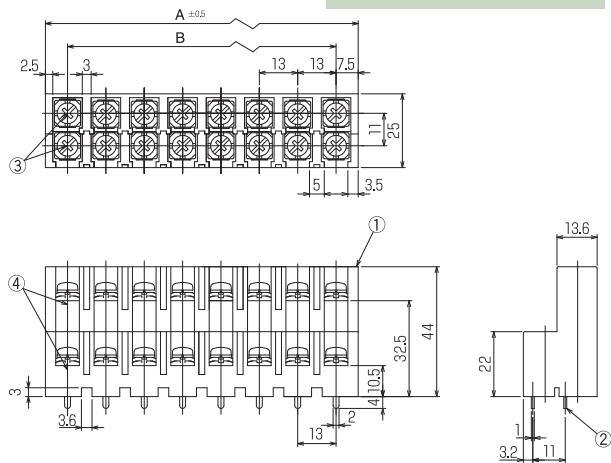

Specifications

Electrical Rating	600V, 30A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Cable Range	Sol AWG20~10 Str AWG18~10
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Copper		Sn	
③	Screw (M4×10L)	Steel		Ni	F Series
④	Nut (M4)	Steel		Cr ³⁺ Zn	

Measurements List of A & B (P : Number of terminals)

P	4	6	8	10	12	14	16
A	28	41	54	67	80	93	106
B	13	26	39	52	65	78	91