OTB-3000N

(FW2)

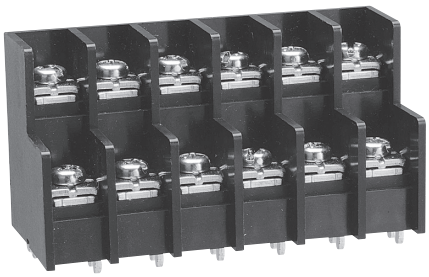

Pitch (terminal to terminal) : 15mm

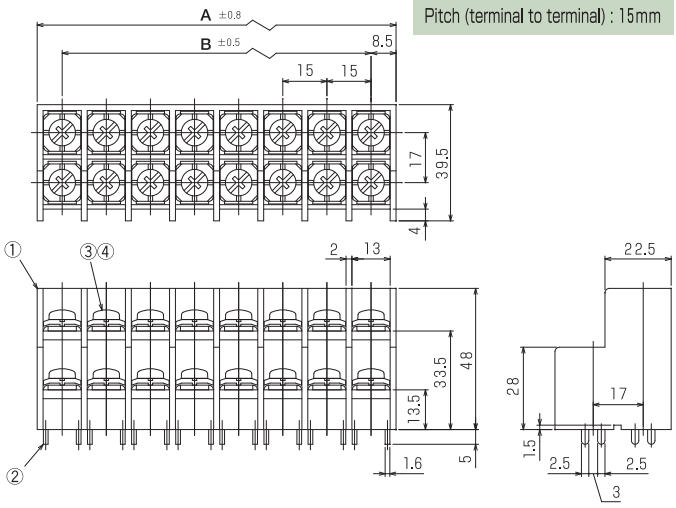

Specifications

Electrical Rating	600V, 70A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	−40℃～+90℃
Usage Temperature Rating	−40℃～+90℃

Measurements List of A & B (P : Number of terminals)

P	2	4	6	8	10	12	14	16	18	20	22	24	26
A	17	32	47	62	77	92	107	122	137	152	167	182	197
B		15	30	45	60	75	90	106	120	135	150	165	180

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V−0		Black
②	Terminal	Copper		Sn	
③	Screw (M5×12L)	Steel		Ni	F Series
④	Hexagon Nut (M5)	Steel		$Cr^{3+}Zn$	



Schematic chart for proper fitting holes. (2～6P)