

# OTB-55




cULus (FW2)

Low Price

Pitch (terminal to terminal) : 7.62mm



※Cover of rotation: Optional

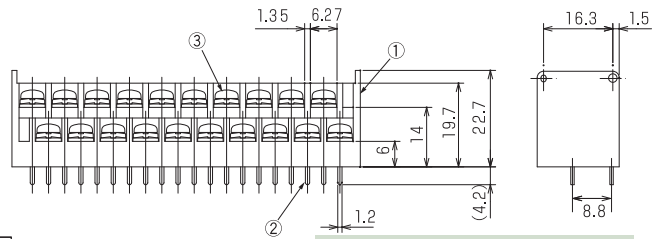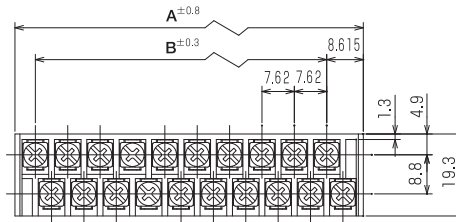

## Specifications

Electrical Rating	250V, 10A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

## Measurements List of A & B ( P : Number of terminals )

P	10	12	16	18	20	30	32	36	40
A		52.72	67.96		83.2	121.3	128.92		159.4
B		38.1	53.34		68.58	106.68	114.3		144.78

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		
②	Terminal	Steel		Sn	
③	Screw	Steel		Ni	F Series