



# OTB-6300-M

UL (FW2) TÜV

OTB-6301-M : Terminal (W) Size=1.0mm

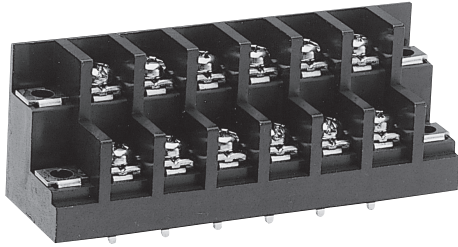

※Cover attachment available

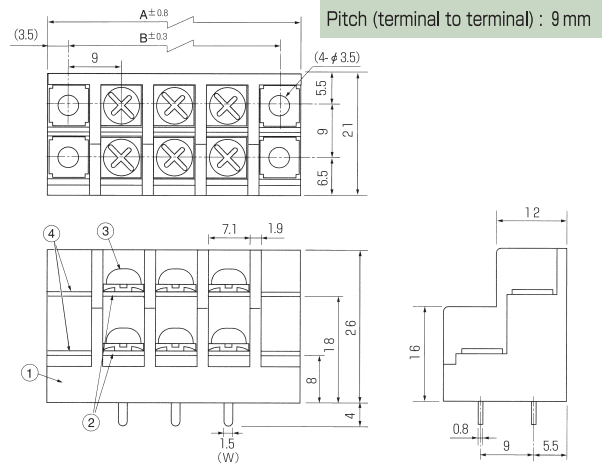

## Specifications

Electrical Rating	250V, 10A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Sn	
③	Screw (M3.5×7L)	Steel		Ni	F Series
④	Mounting Plate	Brass		Ni	

## Measurements List of A & B ( P : Number of terminals )

P	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
A		34	43	52	61	70	79	88	97	106	115	124	133	142	151	160
B		27	36	45	54	63	72	81	90	99	108	117	126	135	144	153