


OULP-948-B

UL US (FW2)


Pitch (terminal to terminal) : 11mm

PAT

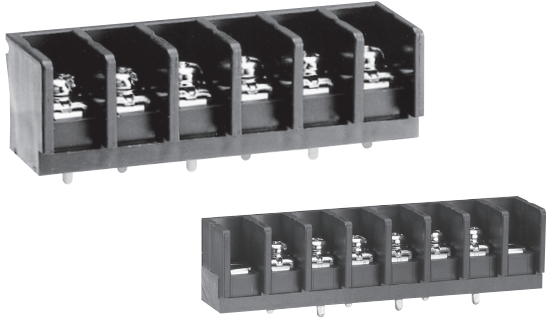

OULP-948-M

※Cover attachment available

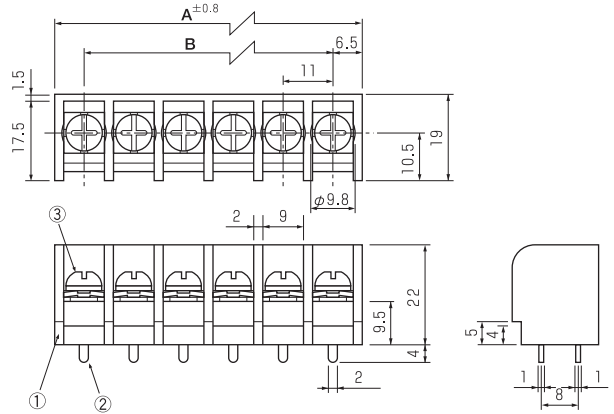

Specifications

Electrical Rating	600V, 30A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Sn	
③	Screw (M4×10L)	Steel		Ni	F Series

Measurements List of A & B (P : Number of terminals) Special Order 11P~15P

	P	2	3	4	5	6	7	8	9	10	11	12	13	14	15
B Type	A	24	35	46	57	68	79	90	101	112	123	134	145	156	167
	B	11	22	33	44	55	66	77	88	99	110	121	132	143	154
M Type	A	46.2	57.2	68.2	79.2	90.2	101.2	112.2	123.2	134.2	145.2	156.2	167.2	178.2	189.2
	B	33	44	55	66	77	88	99	110	121	132	143	154	165	176

