



# OK-11



**OK-11F** With Cover and Marking Strip



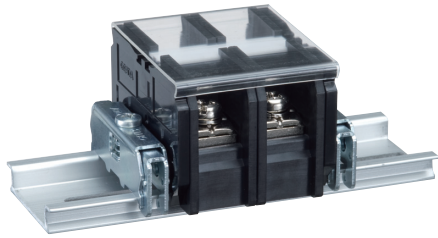


**OK-11R** Cover and Marking Strip (Optional)





Pitch (terminal to terminal) : 18mm

[fix-type] OK-11F



[DIN rail] OK-11R



DIN rail

## Specifications

Electrical Rating	600V, 85A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		
②	Terminal	Brass		Ni	
③	Screw M5x12L	Steel		Ni	F Series
④	Cover	Polycarbonate	94V-0		
⑤	Marking Strip				