
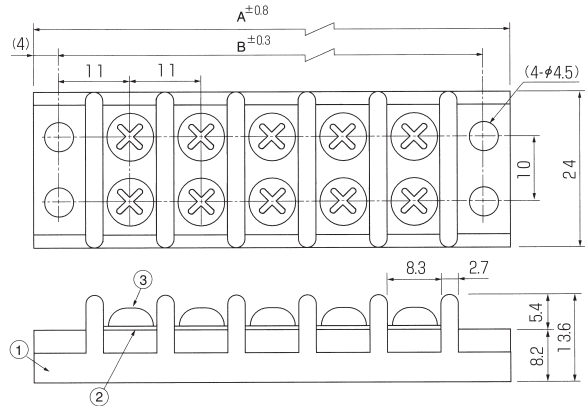


# OTB-541

c  (FW2) TÜV

Pitch (terminal to terminal) : 11mm

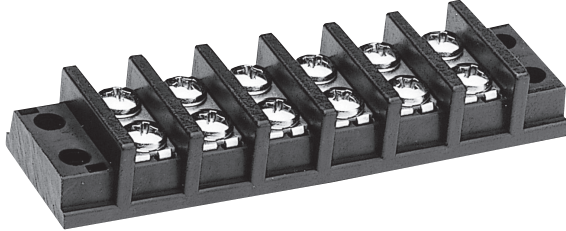

※Cover attachment available

## Specifications

Electrical Rating	250V, 15A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Ni	
③	Screw (M3.5×6L)	Brass		Ni	B Series

## Measurements List of A & B ( P : Number of terminals )

P	1	2	3	4	5	6	7	8	9	10
A	30	41	52	63	74	85	96	107	118	129
B	22	33	44	55	66	77	88	99	110	121