



OTB-913

UL US (FW2)

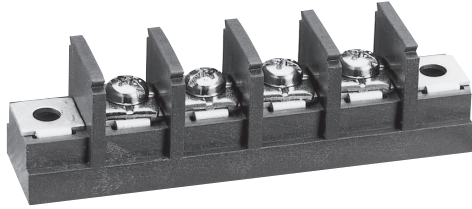

※Instantly Detachable Cover
(Attachment available)

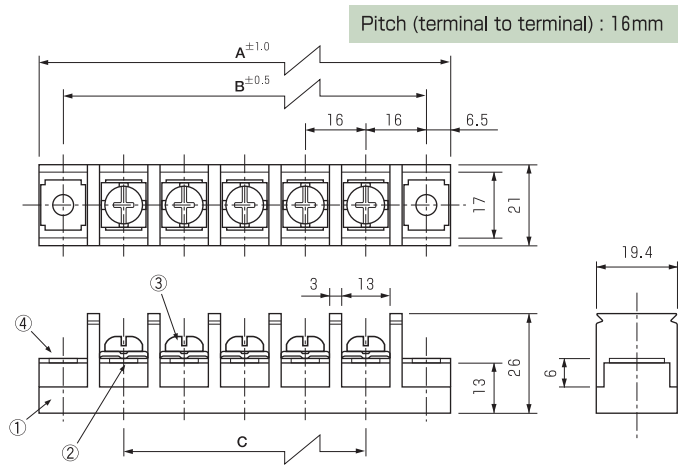

Specifications

Electrical Rating	FW1:600V, 85A / FW2:600V, 60A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Sn	
③	Screw (M5x12L)	Steel		Ni	F Series
④	Mounting Plate	Brass		Ni	

Measurements List of A, B & C (P : Number of terminals)

P	1	2	3	4	5	6	7	8	9	10	11	12	13
A		61	77	93	109	125	141	157	173	189	205	221	
B		48	64	80	96	112	128	144	160	176	192	208	
C		16	32	48	64	80	96	112	128	144	160	176	