


OTB-782-T

(M4 and M4-FB)


OTB-782

UL (FW2)

TUV

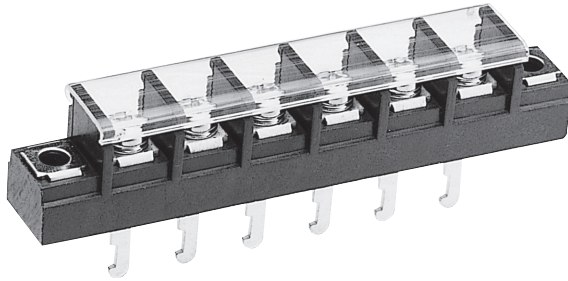

※Instantly Detachable Cover (Optional)

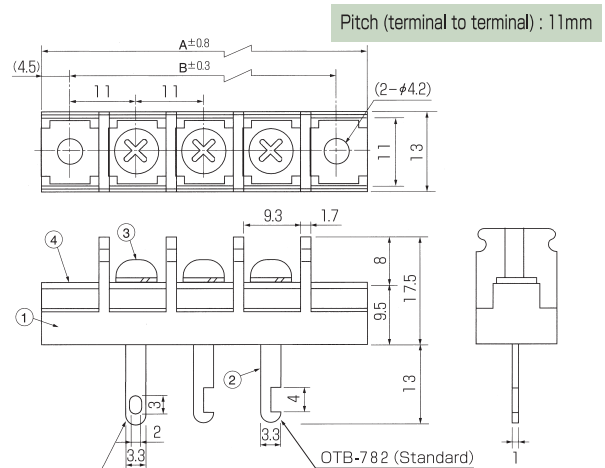

OTB-782-T-M4-FB

OTB-782 (Standard)

Specifications

Electrical Rating	250V, 24A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Sn	
③	Screw (M4) ×8L	Brass		Ni	P and F Series
④	Mounting Plate	Brass		Ni	

Measurements List of A & B (P : Number of terminals)

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A		42	53	64	75	86	97	108	119	130	141	152	163	174	185
B		33	44	55	66	77	88	99	110	121	132	143	154	165	176