
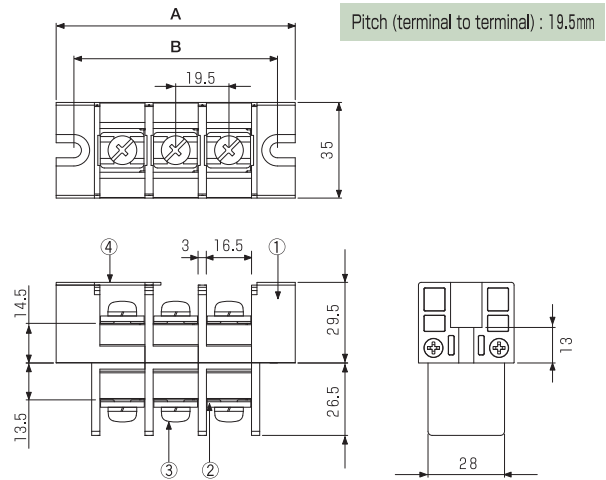


OTB-811

c **UL** us (FW2)

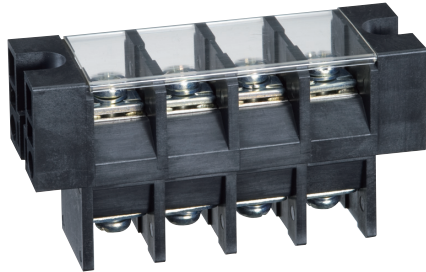

Pitch (terminal to terminal) : 19.5mm

Specifications

Electrical Rating	600V, 110A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Ni	
③	Screw (M6)	Steel		Cr ³⁺ Zn	F Series
④	Cover	Polycarbonate	94V-0		

Measurements List of A & B (P : Number of terminals) Special Order 11P~15P

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	48.5	68	87.5	107	126.5	146	165.5	185	204.5	224	243.5	263	282.5	302	321.5
B	35.5	55	74.5	94	113.5	133	152.5	172	191.5	211	230.5	250	269.5	289	308.5

