
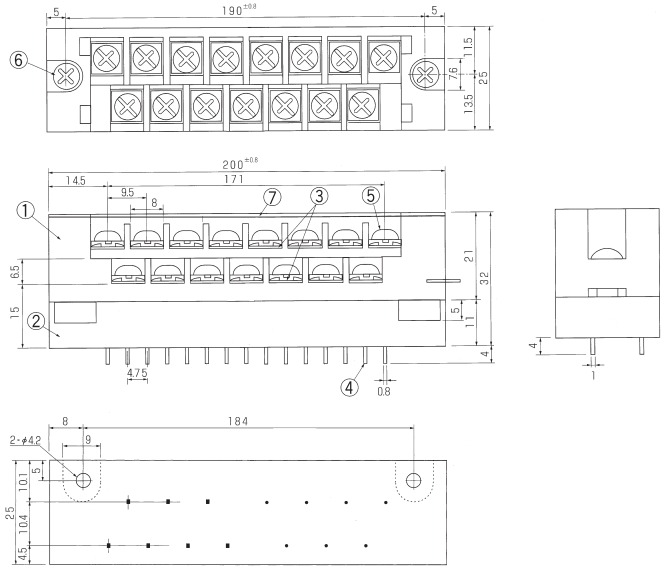


OULK-704S-37P

Pitch (terminal to terminal) : 9.5mm

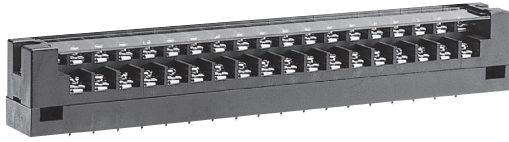

Specifications

Electrical Rating	250V, 10A
Insulation Resistance	DC500V, 1000MΩ
Contact Resistance	15mΩ
Withstanding Voltage	AC2000V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①②	Base	PBT	94V-0		Black
③	Spring	Phosphor Bronze		Au	
④	Contact	Brass		Au	
⑤	Screw (M3.5)×8L	Steel		Ni	F Series
⑥	Attachment Screws	Steel		Ni	
⑦	Cover	Polycarbonate	94V-0		Transparency