




OK-020 **9A (FW2) TÜV** **SCCR 65kA**

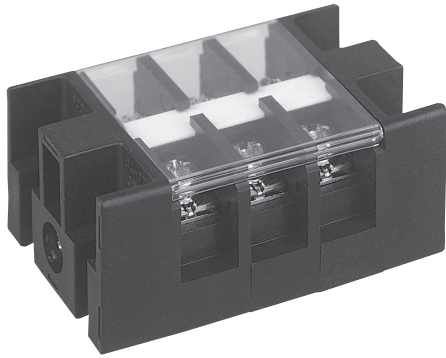


※Finger Protecting Cover (Optional)

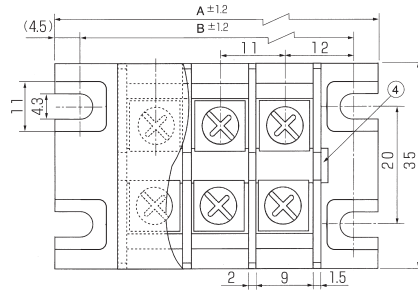

Pitch (terminal to terminal) : 11mm



OK-020-□P-FC

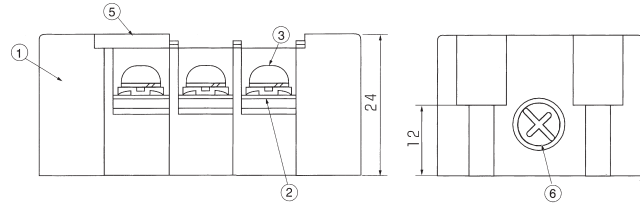

Specifications

Electrical Rating	600V, 30A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Ni	
③	Screw (M4×8L)	Steel		Ni	FB Series
④	Marking Strip				
⑤	Cover	Polycarbonate	94V-0		From 3P to 7P
⑥	Joint Shaft	Steel		Ni	

Measurements List of A & B (P : Number of terminals)

P	1	2	3	4	5	6	7	8	9	10	11	12
A	33	44	55	66	77	88	99	110	121	132	143	154
B	24	35	46	57	68	79	90	101	112	123	134	145