
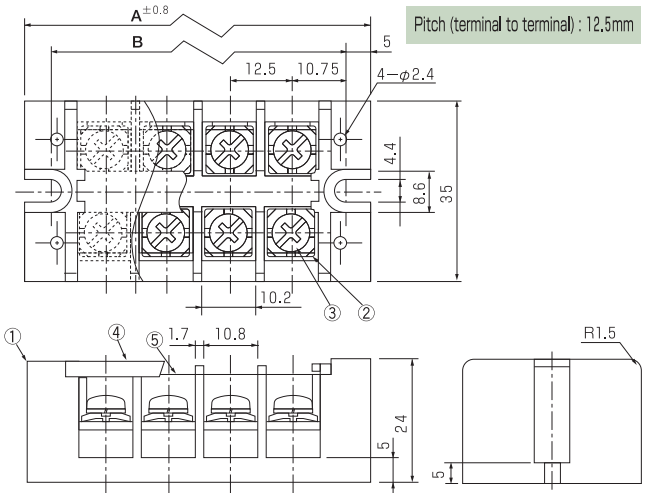


OTB-240N-□P-FB

c **UL** (FW2) **SCCR 50kA**

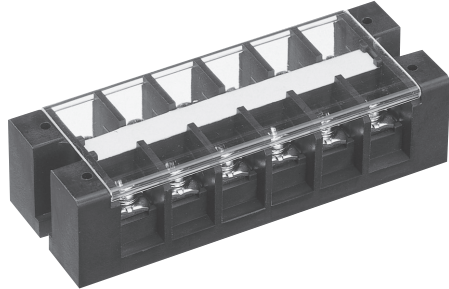

Specifications

Electrical Rating	600V, 30A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Cable Range	5.5mm ²
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Ni	
③	Screw (M4×10)	Steel		Cr ³⁺ Zn	
④	Cover	Polycarbonate	94V-0		Transparency
⑤	Marking Strip				White

Measurements List of A & B (P : Number of terminals)

P	1	2	3	4	5	6	7	8	9	10	11	12
A		44	56.5	69	81.5	94	106.5	119				
B		34	46.5	59	71.5	84	96.5	109				