
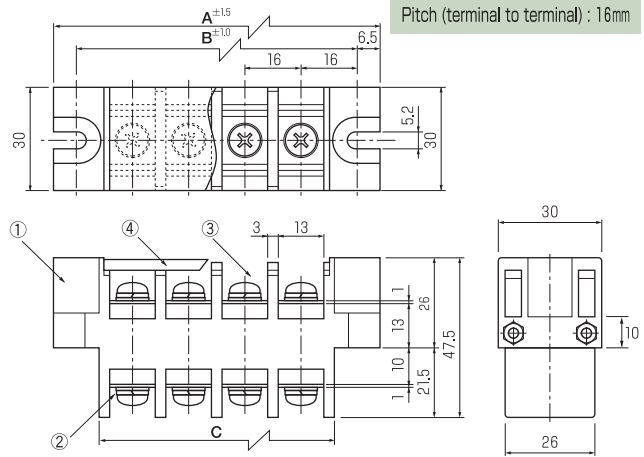


# OTB-358N

 (FW2)  
**SCCR 30kA**

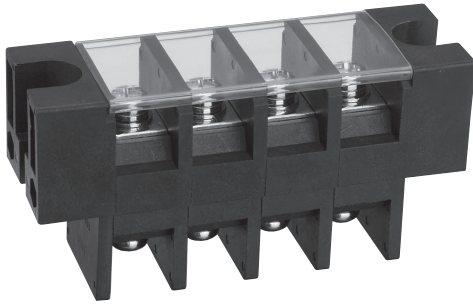

## Specifications

Electrical Rating	600V, 100A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Ni	
③	Screw (M5×12L)	Steel		Ni	
④	Cover	Polycarbonate	94V-0		Transparency

## Measurements List of A, B & C ( P : Number of terminals )

P	1	2	3	4	5	6	7	8	9	10	11	12
A	45	61	77	93	109	125	141	157	173	189	205	221
B	32	48	64	80	96	112	128	144	160	176	192	208
C	19	35	51	67	83	99	115	131	147	163	179	195

